


## HazMat Socks #YSO815 - 3" x 8', 15 socks/package

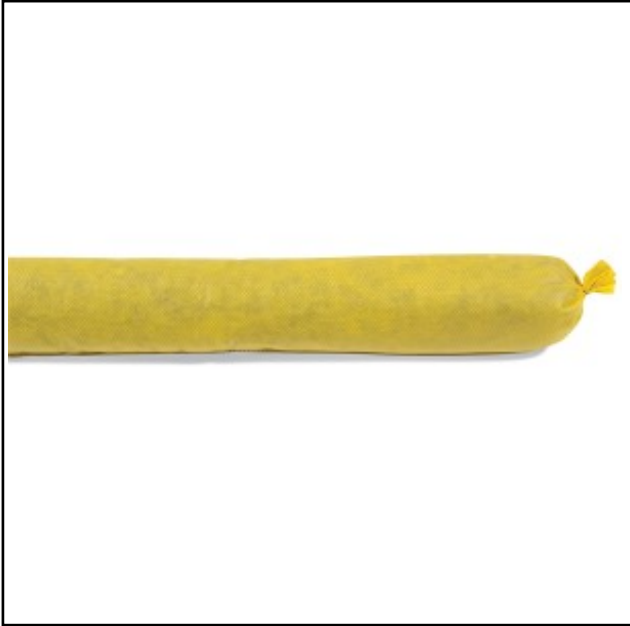

Keep fluids from spreading to larger areas.

- Contain and absorb hazardous or unknown spills
- 100% polypropylene filler (most chemically compatible)
- Fits snugly around the bases of leaky drums and containers
- Color-coded cautionary yellow for fast identification
- Note: Ideal for use with battery acid but not compatible with higher concentrations of sulfuric acid

### YSO815 Specifications

<b>Dimensions:</b>	ext. dia. 3" x 8' L
<b>Shipping</b>	22" W x 24" L x 18.25" H
<b>Dimensions:</b>	
<b>Sold as:</b>	15 socks per package
<b>Color:</b>	Yellow Speckled Filler/Yellow Sleeve
<b>Composition:</b>	100% Polypropylene
<b>Absorbency:</b>	Up to 25 gal. per package
<b>Absorbency per:</b>	Up to 1.7 gal. per sock
<b>Weight:</b>	30 lbs.
<b># per Pallet:</b>	16
<b>Incinerable:</b>	Yes
<b>Ship Class:</b>	175

### Metric Equivalent Specifications

<b>Dimensions:</b>	ext. dia. 7.6cm x 2.4m L
<b>Shipping</b>	55.9cm W x 61cm L x 46.4cm H
<b>Dimensions:</b>	
<b>Absorbency:</b>	Up to 94.6 L per package
<b>Absorbency per:</b>	Up to 6.4 L per sock
<b>Weight:</b>	13.6 kg

## YSO815 Technical Information

### Warnings & Restrictions:

Color Variance Notice  
Color may vary.

### Regulations and Compliance:

49 CFR 173.3(c)(2) - The area between a container and a salvage drum used for overpacking must have "sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed."

40 CFR 263.31 - Transporters, "must clean up any hazardous waste discharge that occurs during transportation...so that the hazardous waste discharge no longer presents a hazard to human health or the environment."

40 CFR 263.30(a) - In the event of a spill, transporters must, "take appropriate immediate action to protect human health and the environment."

40 CFR 112.7(c)(1) - Facilities must have "appropriate containment and/or diversionary structures to prevent discharge oil from reaching a navigable water course."

29 CFR 1910.120(j)(1) - Under an OSHA requirement, "DOT-specified salvage drums or containers and suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks, or ruptures may occur."

### Technical Documents:

(Available at [spilltech.com](http://spilltech.com))

Product Data Sheet (PDS)

Safety Data Sheet (SDS)

Chemical Compatibility (CCG)



**SpillTech**

Online:  
[spilltech.com](http://spilltech.com)

Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[sales@spilltech.com](mailto:sales@spilltech.com)